


Art. no. 348009

Surface-mounted ceiling light Quadrata II 296x296 mm,
16 W, 3000 K, Gray

 **DEKOLIGHT**

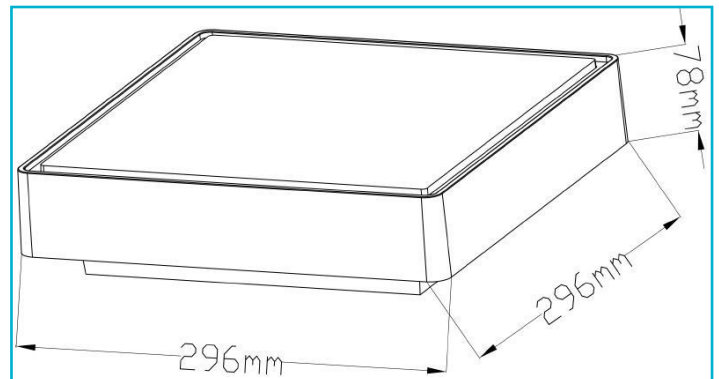

Especially when it comes to lighting house entrances, patios or other access paths, spotlights specially designed for outdoors are the way to go. The protection classes required for such are part and parcel and different colours and shapes are options. Universal use and not to be overlooked as a security product.

Housing Material	Plastic	Switching Cycles	50000
Housing Color	Gray	Power Consumption	16 kWh/1000h
Material of Lens	Plastic	Energy Efficiency Class	G
Colour of Lens	White		
Protection Class	Protection class II/protective insulation		
Rated Input	16 W		
Rated Input Voltage min./max.	220-240 V/AC 50 / 60 Hz		
Frequency			
Power Supply Unit incl.	Yes		
Connection Type	Clamp		
Control	No		
Motion Detector	No		
Light Source	LED, Light source not changeable		
Color Temperature	3000 K		
Colour Consistency	6 SDCM		
Colour Rendering Index (Ra)	80		
Rated Luminous Flux	1110 lm		
Rated Angle of Reflection	115 Degree		
Distribution Characteristic 120°	DLS		
Light Exit Surfaces	1		
Light characteristics	Direct		
Light direction	Below		
Depth	296 mm		
Width	296 mm		
Height	78 mm		
Working Temperature	-20 to 50 °C		
Storage Temperature	-20 to 50 °C		
IP Protection Class	IP 65		
Life Time L70 / B50	30000 h		