
Surface-mounted ceiling light Mensae square Motion, 20 W, 3000 K, Gray







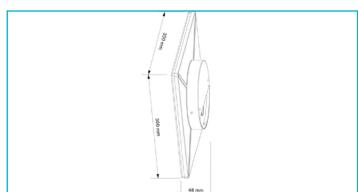

Versatile and functional - The Mensae LED outside wall and ceiling light boasts an impressive flat design and can be used both indoors and outdoors with its movement sensor including daylight sensor. The white cover atop the dark grey aluminium die-cast frame houses 96 warm white LEDs with 18 watts and 3,000 K.

Housing Material Die-cast aluminium

Housing Color Gray **Material of Lens Plastic**

Protection Class Protection class I/protective grounding

Rated Input 20 W

Rated Input Voltage min./max.

Frequency

220-240 V/AC 50 / 60 Hz

Power Supply Unit incl. Yes **Connection Type** Clamp Control No **Motion Detector** No

Light Source LED, Light source not changeable

Color Temperature 3000 K **Colour Consistency** 6 SDCM Colour Rendering Index (Ra) 80 **Rated Luminous Flux** 1240 lm Rated Angle of Reflection 115 Degree DLS

Distribution Characteristic

120°

Light Exit Surfaces Light characteristics Direct

Light direction Top, Below, Side

300 mm Depth Width 300 mm Height 48 mm

Working Temperature -5 to 40 °C **Storage Temperature** -10 to 60 °C **IP Protection Class** IP 54

Life Time L70 / B50 30000 h **Switching Cycles** 100000

Power Consumption Energy Efficiency Class 22 kWh/1000h

G

