Surface-mounted ceiling light Altais, 18 W, 3000/4000/6000 K, white












It takes a lot to catch the Altais series off guard. Thanks to IP54 and impact strength class IK10, these slender outdoor lights are impressive all rounders both in a commercial and private setting. The Altais lights offer additional flexibility with their integrated movement sensor [programmable using remote control] and the adjustable light colour for different lighting scenarios.

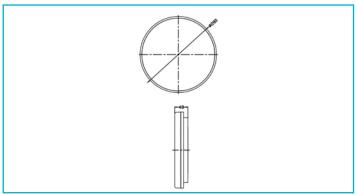

Special features

- · Light colour adjustable in 3 stages
- High impact resistance
- Splash water protected

Housing Material Plastic
Housing Color White

Protection Class Protection class II/protective insulation

220-240 V/AC 50 / 60 Hz

Rated Input 18 W

Rated Input Voltage min./max.

Frequency

Power Supply Unit incl. Yes
Connection Type Clamp

Control No Motion Detector No

Light Source LED, Light source not changeable

Color Temperature 3000/4000/6000 K

Colour Consistency6 SDCMColour Rendering Index (Ra)85Rated Luminous Flux1870 lmRated Angle of Reflection120 DegreeDistribution CharacteristicNDLS

120°

Light Exit Surfaces1Light characteristicsDirectLight directionBelow

Height48 mmDiameter280 mm

Working Temperature -40 to 50 °C
Storage Temperature -10 to 60 °C
IP Protection Class IP 54
IK Protection Class IK10

 Life Time L70 / B50
 50000 h

 Switching Cycles
 75000

 Power Consumption
 18 kWh/1000h

Energy Efficiency Class

D