

**Artikel Nr.: 731130**

Wandaufbauleuchte, Achernar Down, Schwarzgrau RAL 7021, 1x max. 50,00 W

**Technische Daten**

**Charakteristik**

<b>Material</b>	Aluminium Druckguss / Glas
<b>Farbe</b>	Schwarzgrau RAL 7021
<b>Optik</b>	/ klar / transparent
<b>im Lieferumfang</b>	




**Elektrische Daten**

<b>Leistung</b>	1x max. 50,00 W
<b>Eingangsspannung</b>	
<b>Eingangsstrom</b>	
<b>Fassung / Sockel</b>	GU10
<b>Anzahl Sockel</b>	1
<b>Netzgerät</b>	
<b>Ansteuerung</b>	dimmbar über optionales Leuchtmittel
<b>Anschlussmöglichkeit</b>	Klemme
<b>Schutzklasse I, II, III</b>	I



**Artikel Nr.: 731130**

Wandaufbauleuchte, Achernar Down, Schwarzgrau RAL 7021, 1x max. 50,00 W

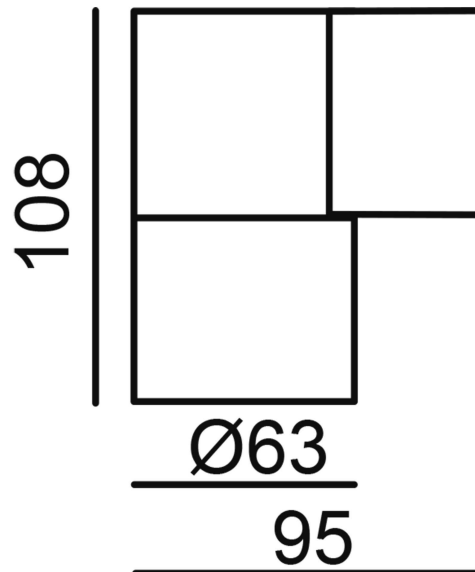

**Lichtrichtung**

Dreh- und Schwenkbereich	feststehend
Neigungswinkel	
Abstrahlverhalten	
Reflektor / Linse	

**Abmessungen und Gewicht**

Länge	108,00
Breite	0,00
Höhe	95,00
Durchmesser	63,00
Deckenabhängung	0,00
Gewicht	

**Sockelmaß**


Länge	0,00
Breite	0,00
Höhe	0,00
Durchmesser	0,00

**Artikel Nr.: 731130**

Wandaufbauleuchte, Achernar Down, Schwarzgrau RAL 7021, 1x max. 50,00 W

**Grenzwerte**

<b>Betriebstemperatur</b>	-20°C - +50°C
<b>Lagertemperatur</b>	-10°C - +60°C
<b>IP - Schutzart</b>	IP65

<b>EEL</b>	Die Leuchte ist geeignet für Leuchtmittel der Energieeffizienzklassen A++ bis E
<b>IP65</b>	Schutz gegen das Eindringen von Staub. (Staubdicht) Geschützt gegen Strahlwasser.
	Leuchte der Schutzklasse I bei der der Schutz gegen elektrischen Schlag nicht allein auf der Basisisolierung beruht, sondern die eine zusätzliche Sicherheitsvorkehrung derart enthält, dass berührbare leitfähige Teile mit Mitteln zum Anschluss an den Schutzleiter der festen Installation ausgerüstet sind, so dass im Fehlerfall der Basisisolierung berührbare leitfähige Teile nicht aktiv werden können.

**Article no.: 731130**

Surface mounted wall lamp, Achernar Down, Black grey RAL 7021, 1x max. 50,00 W

**Technical Data**
**General Characteristics**

<b>Material</b>	aluminum die casting / glass
<b>Colour</b>	Black grey RAL 7021
<b>Optics</b>	/ clear / transparent
<b>included in delivery</b>	


**Electrical Characteristics**

<b>Power</b>	1x max. 50,00 W
<b>Input voltage</b>	
<b>Input current</b>	
<b>Base (standard designation)</b>	GU10
<b>Number of bases</b>	1
<b>Power supply unit</b>	
<b>Electronically reversible</b>	dimnable via optional bulb
<b>Connection possibility</b>	clamp
<b>Protection class I, II, III</b>	I



**Article no.: 731130**

Surface mounted wall lamp, Achernar Down, Black grey RAL 7021, 1x max. 50,00 W

**Light Direction**


Rotating and tilting range	fixed
Angle of inclination	
Radiation direction	
Reflector / lense	

**Dimensions & Weight**

Length	108,00
Width	0,00
Height	95,00
Diameter	63,00
Suspensions from ceiling	0,00
Product Weight	

**Base dimensions**

Length	0,00
Width	0,00
Height	0,00
Diameter	0,00

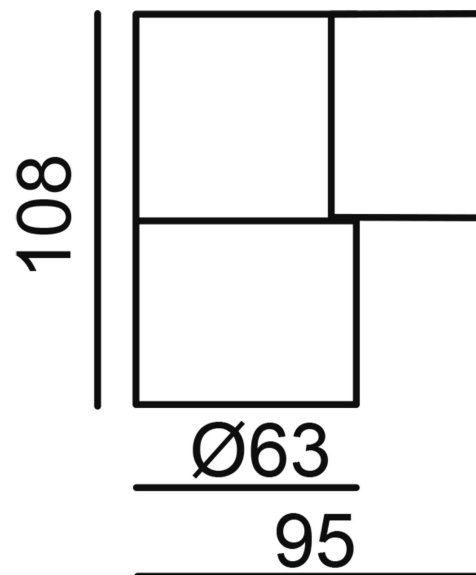

**Article no.: 731130**

---

Surface mounted wall lamp, Achernar Down, Black grey RAL 7021, 1x max. 50,00 W

**Absolute maximum ratings**

<b>Working temperature</b>	-20°C - +50°C
<b>Storage temperature</b>	-10°C - +60°C
<b>IP - Code</b>	IP65

---

<b>EEL</b>	The luminaire is suitable for lamps of energy efficiency classes A++ to E.
------------	--

---

<b>IP65</b>	Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.
-------------	--



---

Lightings of Protection Class I  
in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.

---