

Artikel Nr.: 862179

Netzgerät, BASIC, DIM, Multi CC, 50D-1HMC-0, DALI












IP20 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	47,20-50,40 W	Leistungsfaktor	0,95
Ausgangsspannung	9-50,4V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	1050/1100/1150/1200/1250/ 1300/1350/		

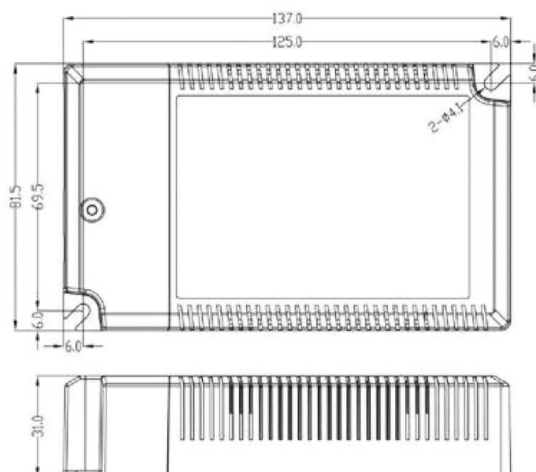
Produkteigenschaften

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - DALI-Bus nach IEC 62386 DALI 2.0 / Intelli-Push	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862179



Netzgerät, BASIC, DIM, Multi CC, 50D-1HMC-0, DALI

**Abmessungen und Gewicht****Grenzwerte**

Länge	137,00 mm	Betriebstemperatur	-20°C - +50°C
Breite	82,00 mm	Gehäusetemperatur	95 °C
Höhe	31,00 mm	max. Menge Sicherungsautomaten	B10A=17, B16A=28, C10A=35, C16A=56
Durchmesser	0,00 mm	max. Einschaltstrom	40A/12,8µs
Gewicht	221 g	kapazitive Last	

Multi-CC variable Leistungs-/Spannungsbereiche / Multi-CC variable power/voltage ranges

Stromstärke / Current	Leistung / Power	Spannung / Voltage
1050mA	9,45W - 47,25W	9V - 45V
1100mA	9,90W - 49,50W	9V - 45V
1150mA	10,35W - 49,45W	9V - 43V
1200mA	10,80W - 50,40W	9V - 42V
1250mA	11,25W - 50,00W	9V - 40V
1300mA	11,70W - 49,40W	9V - 38V
1350mA	12,15W - 49,95W	9V - 37V
1400mA	12,60W - 50,40W	9V - 36V

max. 2 Lampen je Kanal - Spannungsbereich überprüfen! / max. 2 lamps per channel - check voltage range!

Article No.: 862179

Power supply unit, BASIC, DIM, Multi CC, 50D-1HMC-0, DALI












IP20 

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	47,20-50,40 W	Power factor	0,95
Output voltage	9-50,4V DC	Connection possibility	clamp
Output current	1050/1100/1150/1200/1250/ 1300/1350/		

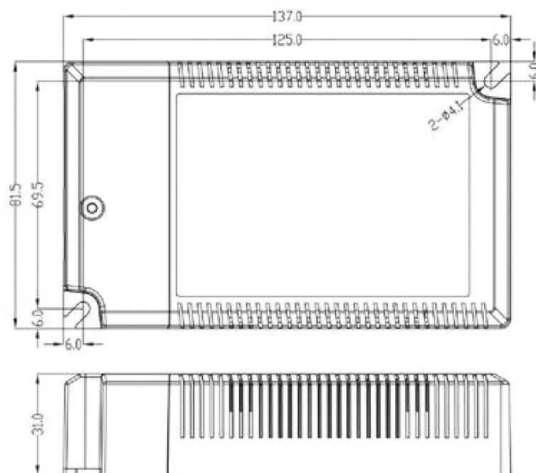
Product features

	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - DALI-Bus according to IEC 62386 DALI 2.0 / Intelli-Push	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862179

Power supply unit, BASIC, DIM, Multi CC, 50D-1HMC-0, DALI



Dimensions & Weight

Absolute maximum ratings

Length	137,00 mm	Operating temperature	-20°C - +50°C
Width	82,00 mm	Case temperature	95 °C
Height	31,00 mm	max. amount of circuit breakers	B10A=17, B16A=28, C10A=35, C16A=56
Diameter	0,00 mm	max. inrush current	40A/12,8µs
Product weight	221 g	capacitive load	

Multi-CC variable Leistungs-/Spannungsbereiche / Multi-CC variable power/voltage ranges

Stromstärke / Current	Leistung / Power	Spannung / Voltage
1050mA	9,45W - 47,25W	9V - 45V
1100mA	9,90W - 49,50W	9V - 45V
1150mA	10,35W - 49,45W	9V - 43V
1200mA	10,80W - 50,40W	9V - 42V
1250mA	11,25W - 50,00W	9V - 40V
1300mA	11,70W - 49,40W	9V - 38V
1350mA	12,15W - 49,95W	9V - 37V
1400mA	12,60W - 50,40W	9V - 36V

max. 2 Lampen je Kanal - Spannungsbereich überprüfen! / max. 2 lamps per channel - check voltage range!

