

Artikel Nr.: 862209

Netzgerät, BASIC, DIM, CC, D105040NTF/40W












IP20 CE

Elektrische Daten

Betriebsart	stromkonstant	Eingangsspannung	220-240V AC/50-60Hz
Leistung	20,00-40,00 W	Leistungsfaktor	0,95
Ausgangsspannung	19-38V DC	Anschlußmöglichkeit	Klemme
Ausgangsstrom	1050 mA		

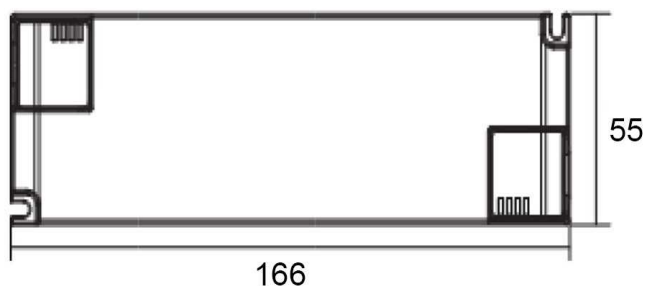
Produkteigenschaften

	Schutzklasse II		Überspannungsschutz
SELV	Schutzkleinspannung		Lampenbetriebsgerät 110
	Kurzschlußfest		Möbeleinbau geeignet
	Überlastschutz	ErP	Standby-Stromverbrauch < 0,5 W
	Übertemperaturschutz	LVD	Sicherheit nach EN 61347
	Sicherheitstrafo	EMC	Funkentstörung + Störfestigkeit nach EN 55015 + EN 61547
	dimmbar - Phasen-/abschnitt	EMC	Netzstromoberwellen + Flicker nach EN 61000-3-2 + EN 61000-3-3

Schwarze Felder sind zutreffend / graue Felder sind nicht zutreffend

Artikel Nr.: 862209

Netzgerät, BASIC, DIM, CC, D105040NTF/40W

**Abmessungen und Gewicht****Grenzwerte**

Länge	166,00 mm	Betriebstemperatur	-20°C - +45°C
Breite	55,00 mm	Gehäusetemperatur	85 °C
Höhe	25,00 mm	max. Menge Sicherungsautomaten	B10A=140, B16A=224, C10A=280, C16A=440
Durchmesser	0,00 mm	max. Einschaltstrom	5A/100µs
Gewicht	179 g	kapazitive Last	

Article No.: 862209

Power supply unit, BASIC, DIM, CC, D105040NTF/40W

















IP20 CE

Electrical Characteristics

Operating mode	constant current	Input voltage	220-240V AC/50-60Hz
Power	20,00-40,00 W	Power factor	0,95
Output voltage	19-38V DC	Connection possibility	clamp
Output current	1050 mA		

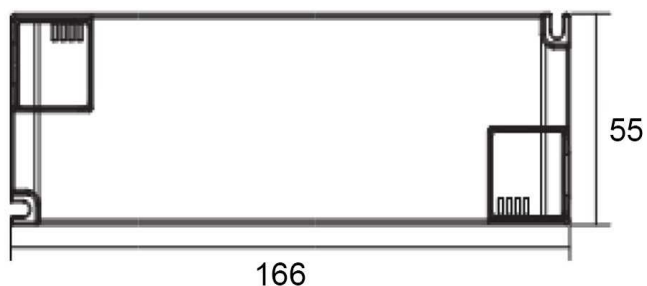
Product features

	Protection class II		Overvoltage protection
	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection		Standby-power consumption < 0,5 W
	Overheating protection		Safety according to EN 61347
	Safety transformer		Interference suppression + immunity according to EN 55015 + EN 61547
	dimnable - leading/trailing edge		Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Article No.: 862209

Power supply unit, BASIC, DIM, CC, D105040NTF/40W

**Dimensions & Weight****Absolute maximum ratings**

Length	166,00 mm	Operating temperature	-20°C - +45°C
Width	55,00 mm	Case temperature	85 °C
Height	25,00 mm	max. amount of circuit breakers	B10A=140, B16A=224, C10A=280, C16A=440
Diameter	0,00 mm	max. inrush current	5A/100µs
Product weight	179 g	capacitive load	